


TEC Specification Sheet

| Part # | I _{max} (Amps) | Q _{max} (Watts) | V _{max} (Volts) | DT _{max} (°C) | T _{max} (°C) |
|-------------------------|-------------------------|--------------------------|--------------------------|------------------------|-----------------------|
| 25412-5L31-07CQQ | 7.0 | 48.0 | 15.2 | 90°C | 125°C |

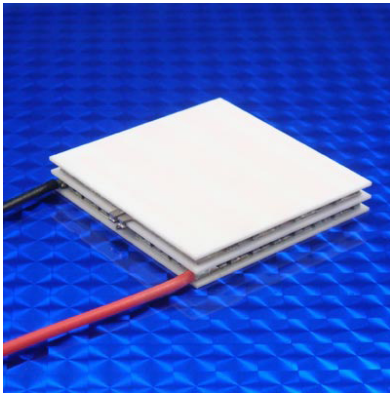

2 Stage TEC

Lapped ceramic faces

Options:


Available Sealed for moisture protection

Call for custom wire types


Call for custom options

| Bottom Plate | | | | Top Plate | | | | Metallized Height | | Lapped Height | |
|--------------|------|-------|------|-----------|------|-------|------|-------------------|----|---------------|------|
| A | | B | | C | | D | | H | | H | |
| mm | in | mm | in | mm | in | mm | in | mm | in | mm | in |
| 40.00 | 1.57 | 40.00 | 1.57 | 40.00 | 1.57 | 40.00 | 1.57 | NA | NA | 6.6 | .260 |

| |
|--------------------|
| Weight (w/o leads) |
| 39 grams |

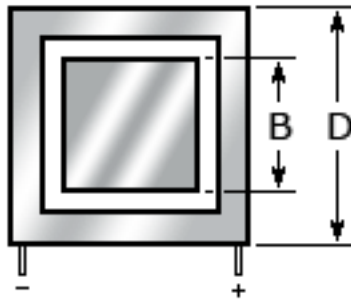

TOP VIEW



SIDE VIEW

