


# TEC Specification Sheet

Part #	I <sub>max</sub> (Amps)	Q <sub>max</sub> (Watts)	V <sub>max</sub> (Volts)	DT <sub>max</sub> (°C)	T <sub>max</sub> (°C)
<b>00901-9L31-09BPA</b>	9.0	5.32	1.15	67°C	200°C

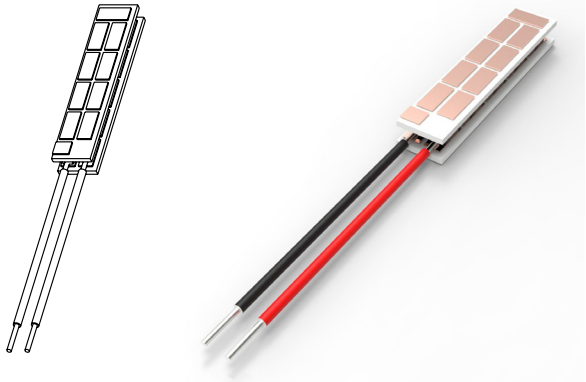

### Custom Options:


Call for custom wire types and other custom options.

### Notes:

Typical power input is 40% to 80% of I<sub>max</sub>  
 Maximum Waste Heat (exiting the hot side) at 100% input power, I=I<sub>max</sub>, V=V<sub>max</sub> is;  
 $(I_{max} * V_{max}) + Q_{max} = 15.67 \text{ watts}$   
 Use of a properly sized heat sink or water block is required to remove waste heat.

Bottom Plate				Top Plate				Metallized Height		Lapped Height	
A		B		C		D		H		H	
mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
8.0	0.31	38.1	1.50	8.0	0.31	38.1	1.50	5.2	.205	NA	NA

Weight (w/o leads)  
**5 grams**

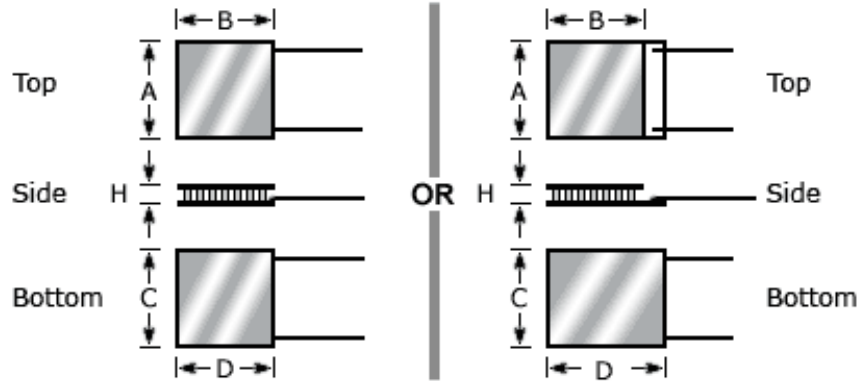

Tolerances (typical)  
 A, B, C, D = ±0.25mm (±0.01")  
 H = ±0.15mm (±0.006")

